




End User Perspective on Higher Speed Ethernet

Lane Patterson, Chief Technologist, Equinix
Louis Lee, Sr. Network Architect, Equinix



- A range of fabric trunking:
 - Single IBX fabric
 - local fiber x-connects between 2 switches
 - Campus fabric
 - lots of fiber pairs available
 - Distance < 10km
 - Metro fabric
 - More expensive dark fiber available, usually need to optimize via DWDM
 - Distance < 40km

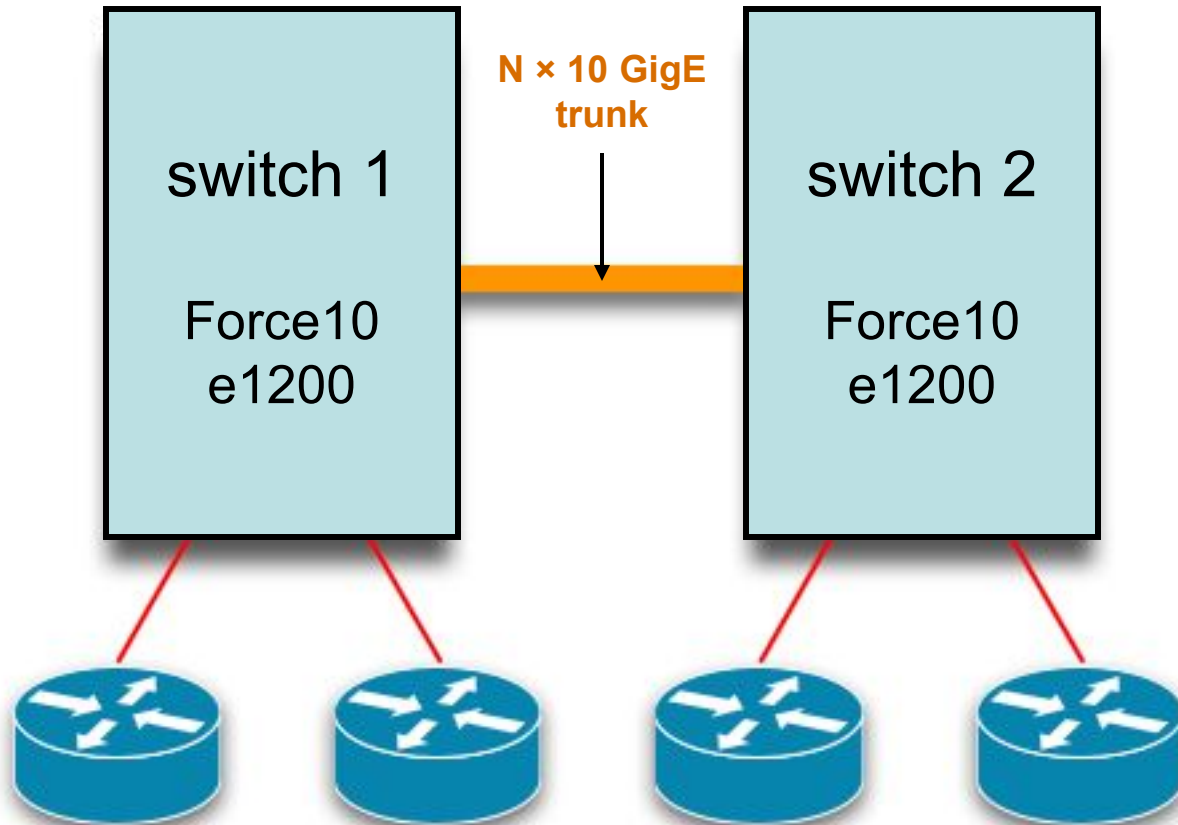

IX participants with FastE, GigE, NxGigE, and 10 GigE connections



Current Utilization: Nation-Wide Across All Exchanges

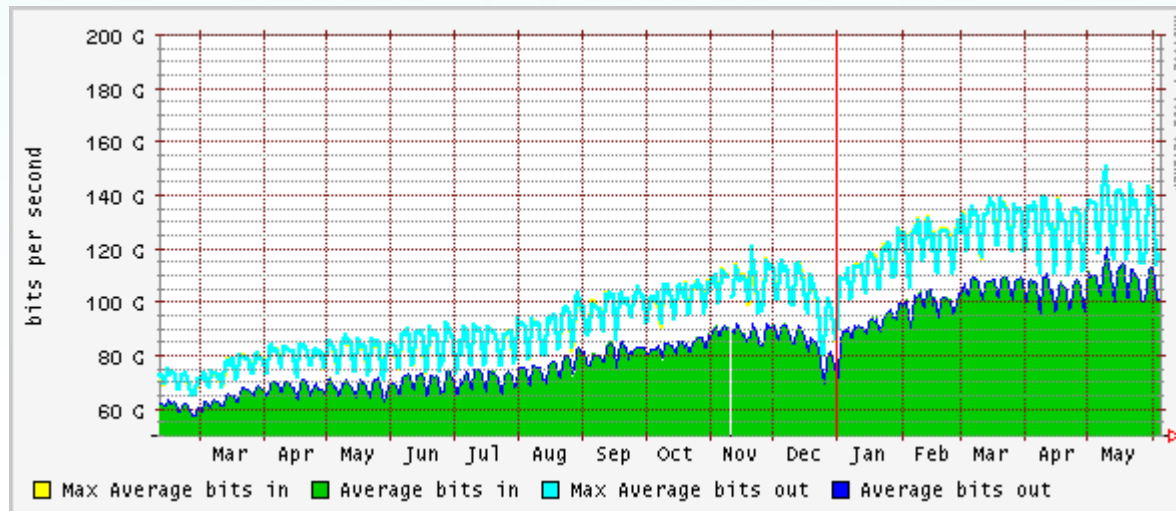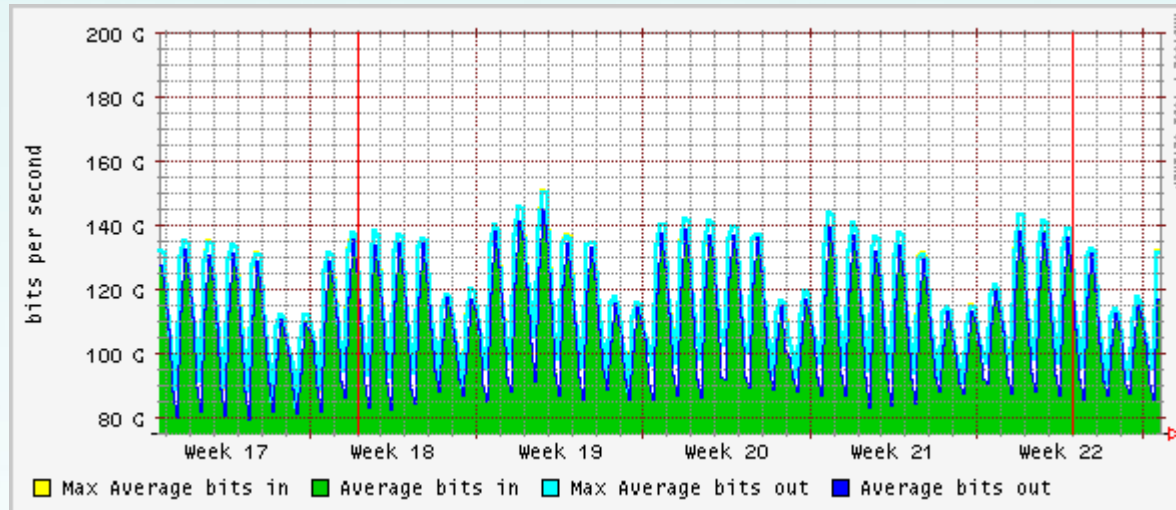

- Current DC/Ashburn peak ~80G
- 200G by year-end 2008
- 400G by year-end 2009
- 800G by year-end 2010 ← 100G standard available?!
- Trunks in 2010 would be ~ 4x100G
- Would require 10x40G if no 100G available
 - ***40G too little, too late for large IXPs***

- Washington, D.C. 10GE connections:
 - Late 2005 - 1st customer 10GE
 - Today - 35 10GE customer connections
 - Before 2008 - several 2 × 10GE customer LAGs
 - By 2009 – several 4 × 10GE customer LAGs
- Traffic is doubling every year! There is no reason to expect that this growth will slow down within the next 5 years.

- Link Aggregation concerns:
 - 10GE port density on switches!!
 - Additional fibers or WDM equipment
 - Added cost
 - More complexity
 - Traffic distribution across customer LAG links are less than optimal due to large flows.

Equinix's Requirements for Higher Speed Ethernet

- 100 Gbps or greater
- 10 km SMF
- 40km SMF
- Port density:
 - 1 × 100GE port should not replace more than 4 × 10GE
- Link fault signaling support
- Link aggregation support

Thank you. Questions?

Louis Lee <louie@equinix.com>

Lane Patterson <lane@equinix.com>